

# COMPOSITE DECKING

LOGGIE COLLECTION



**COMPOSITE DECKING:** Loggie provides a dynamic alternative to wood and decking, featuring wood graining detail, anti-skid, fade and mildew resistant, a one-time investment for beautiful long lasting low maintenance decking complete with a 20 year limited performance warranty.



SOLID CORE  
GIT1083 Double sided color



STARTER PLANK  
GIT1084



GROOVED HOLLOW PLANK  
GIT1085



CLIPS AND SCREWS  
GIT1086



START CLIPS (METAL)  
GIT1060



STARTER PLANK  
GIT1097

GIT Loggie Decks are manufactured as relaxing spaces not as a place of work.

## Tips: For GIT Loggie decking

Planning your decking project before starting construction can save time, money and effort.

Consider your Loggie decking board pattern, such designs as Picture Frame, Tile and Herring bone will require different framing methods.

Measure site, determine load capacity of the deck taking into account heavy objects such as hot tubs, Planters Seating. Deck board span will have to be reduced with additional joist required. Lay out your post and joists plan .Consult with a local engineer or building inspector to ensure compliance with local building codes.

Gas and wood fire pits and burners are not to be installed over decking. Install by cutting the decking to fit pit. Install a fire resistant material under the pit and install a stone protective wall. Sparks and heat can damage the decking.

Pre drill deck boards before screwing

Ensure gap between deck board ends, post, walls and other solid structures.

Substructure needs to be level and sound. Plane high spots.

### **Tools Required:**

Miter saw ( sharp fine tooth blade )      Cordless drill and bits      Power planer

Chalk line ( use only dust of Marking Chalk lines not the permanent ones to prevent discoloration of the decking)

Jig sawSquare Safety equipment      Tape measure Carpenters pencil

### **Job Site Storage:**

When storing decking on site ensure the decking is not stored on the ground but a flat level surface. For stacking bundles use 2x4 sticking method beginning 6" from the end ,24" thereafter finish with 6" from the end .

For stacking additional stacking use 2x4 sticking method lining up vertically

Max stacking height is 3 bundles

Always cover decking product on site until ready to use.

### **Maintaining and Cleaning:**

For general dirt use hose and spray to remove. To remove stubborn areas using soft bristle and warm soapy water.

Pressure washers can be used if has a PSI no greater than 2100 PSI while using the fan attachment and soap dispenser

Hard water can stain the deck with mineral deposits this is not a material defect but rather an issue with the water.

Vinegar makes a good cleaning solution for these hard water deposits. After using a no hard water rinse should be done. Certain cases a deck brightener product can be used.

Remove snow with a plastic shovel avoid the metal edge model.

Remove Ice with a rock salt Food spills need to be removed right away with hose soapy water and soft bristle brush.

Remove mold and mildew using soapy water and soft bristle brush.

If working with metal, mortar, cement, concert, stucco, paint and plaster cover the decking. When these material come into contact with the decking a reaction can take place with the surface and leave permeate staining. Some rubber back mats contain chemicals that may discolor the decking surface.

### **Installation of GIT Loggie Decking:**

**1-** Check the framing, make sure it corresponds to the deck pattern you are laying . Check for any high spots, remove these with the planner. Ensure that support posts are trued and secured. Make sure framing is up to your local building codes.

Use only starter clips, fasteners, screws and plugs Supplied by GIT with the Loggie decking system. These are specify designed for the system and use is required to keep your warranty

The Loggie decking Bullnose starter board is recommended for all exterior sides. Ensure color match to the decking boards. Loggie boards are standard with reversible wood grain teak and cherry color finish. Lay a section the decking out to ensure grain and color matching. Check to make sure that edges have not been damages from handling, are free from defects, and to make sure the ends are square.

**2-** Install the GIT 1087 starter clip on the exterior premotor of the decking, spacing on 16 inch centers with the deck screw provided .Slip the 1084 solid core bullnose starter plank (bullnose side out) over the clips. Be care full to ensure that the bullnose is equal distance from the facer board and the end of the deck.

**3-** In the centre of the joist place the GIT 1086 joiner bracket in the grove of the starter plank. Screw to the joist with screws provided. Repeat over center of the joist for the length of the decking plank.

**4-** Repeat the process for the next decking plank.


**5-** Installation of Stair Treads. Repeat steps in A1.

**6-** Ensure a 3/16 drainage gap between decking planking width to width.

**7-** Ensure a 1/8 drainage gap end to end width for temperatures over 40 degree F and 3/16 for below 40 degree F

**7-** Ensure ½ " to ¼ " when butting up to solid objects

**8-** When doing patterns Joist spacing will need to be altered.

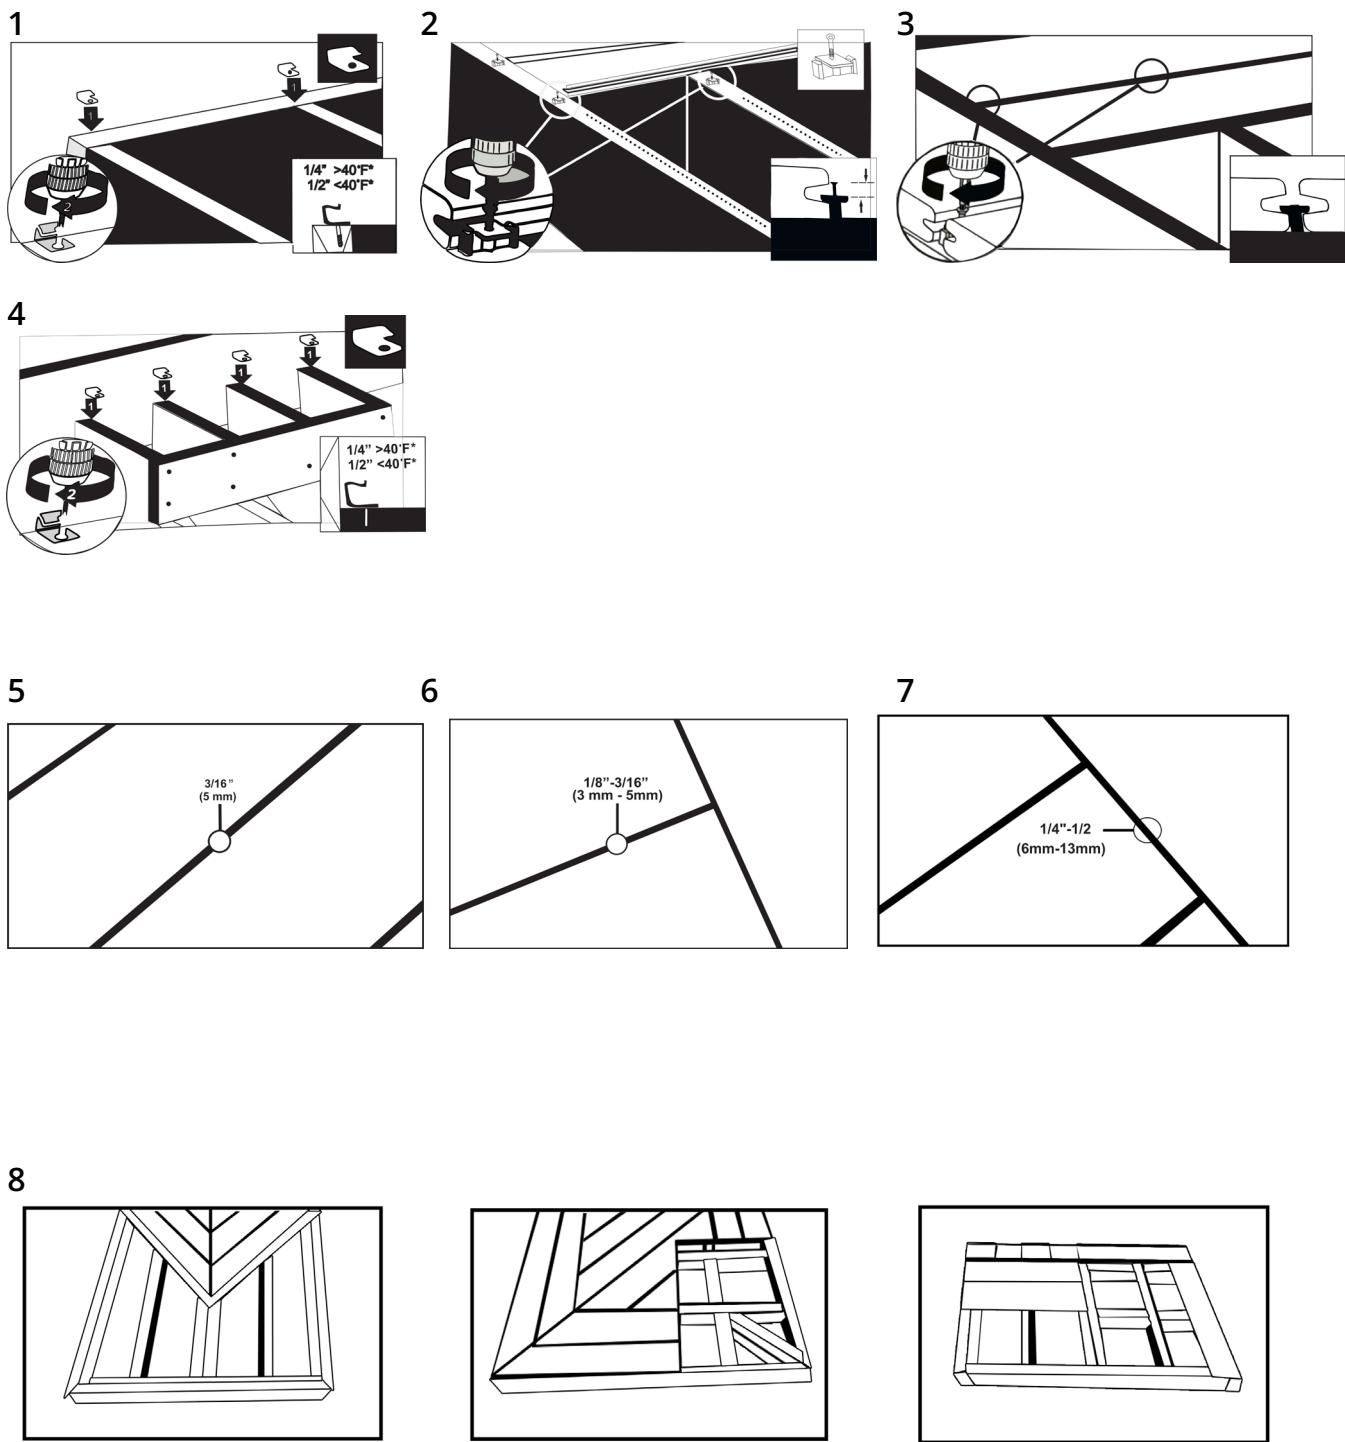

## **Product Warranty Terms:**

GIT Wholesale Co.

### **1- Limited warranty**

1.1 GIT guarantees to the direct purchaser of GIT products that under normal use, GIT products will not:

Splinter      Delaminate      Rot      Termite damage      Structural damage caused by insects

For products used for private purposes, the warranty period is

<b>GIT Wholesale products</b>	<b>Warranty period-Residencial</b>	<b>Warranty period-Commercial</b>
<b>1st Generation</b>	<b>15 years</b>	<b>5 years</b>

Referred to GIT Terms and conditions for the sales good.

### **2- Pro-Rated Warranty Schedule:**

#### **RESIDENTIAL**

<b>Refund Amount or Products Replacement</b>	<b>Time After Original Purchase</b>
	<b>1st Generation</b>
100%	<b>0-3 years</b>
70%	<b>3-6 years</b>
50%	<b>6-9 years</b>
30%	<b>9-12 years</b>
10%	<b>12-15 years</b>
0	<b>&gt;15 years</b>

#### **COMMERCIAL**

<b>Refund Amount or Products Replacement</b>	<b>Time After Original Purchase</b>
	<b>1st Generation</b>
100%	<b>0-1 years</b>
50%	<b>1-3 years</b>
30%	<b>3-5 years</b>
0	<b>&gt;5 years</b>

## **Product Warranty Terms:**

GIT Wholesale Co.

### **2.1 GIT Wholesale does not assume any responsibility for product problems caused by the following reasons:**

- 1- Improper installation or installation according to the installation guide of GIT Wholesale including but not limited to improper reserved size, gap size, drainage system, joist installation, incorrect fitting use, etc.
- 2- Use beyond the scope of application of the product, or fail to follow the guidelines of GIT Wholesale and comply with local building regulations.
- 3- Any uncontrollable factors: such as floods, hurricanes, earthquakes, lightning strikes, wars, etc.
- 4- Application of surface treatments or other chemical substances including but not limited to paints, stains, cleaners, coatings or pesticides.
- 5- Color deviation, fading, spotting, staining or other discoloration, deformation, or small cracks caused by normal weathering, mold, mildew, or other fungal growth, organic materials, or other environmental pollutants and foreign substances.
- 6- Defects caused by improper use, improper storage and improper loading and unloading of the product by the purchaser, the transporter or any other third party.
- 7- Fragmentation and damage caused by man-made or hard objects.
- 8- Within the maximum permitted scope of the law, GIT Wholesale does not need to bear the cost of dismantling and installing damaged products, and the handling and transportation costs of replacement product. Under no circumstances will GIT Wholesale be liable for any damage (any nature of description) beyond the actual purchase price of the defective product, and pay for it according to the proportion specified in this warranty.
- 9- Warranty is not transferable.

### **2.2 GIT Wholesale does not authorize any individual or entity to provide any warranty service other than this warranty. Warranty Terms and conditions will not change after purchaser sends purchase order to GIT.**

## **3. Legal Terms**

- 3.1 Any dispute arising from this agreement or any other issues related to this agreement shall be referred to the Saint John, NB Court for settlement.
- 3.2 Whether or not there is a conflict of laws, the terms of the insured shall be interpreted using the laws of the people's New Brunswick, Canada.